

PORCELAIN TILES

150 X 750



WHITE HORSE

WHITE HORSE
CERAMIC

LOOS SERIES



Porcelain



Wall



Floor



V2
Variation

Magnificent beauty

Loos truly are fascinating works of nature. Their magnificent beauty is a sight to behold and though their eruptions are frightening, out of it comes another beauty.

1 SIZE | 2 COLOURS | 12 SURFACE (**M** MATT FINISH, GLAZED)



MH75001 | 150x750mm



MH75003 | 150x750mm

Loos series increase the magnitude of application towards any part of the house, where restriction is an obstacle of the past. The raw and bare surface of driftwood is studied in detail and engineered into porcelain tiles, which makes this remarkable design extremely easy to maintain and durable

LOOS SERIES

H75003 150mm x 750mm



LOOS SERIES

H75001 150mm x 750mm

MADERERO SERIES

natural touch

Maderero series bears a striking similarity to real wood. The tile's long rectangular shape makes it easy to further accentuate the artistic appeal of your spaces.



Porcelain



Wall



Floor



V2

Variation

1 SIZE | 3 COLOURS | 12 SURFACE (**M** MATT FINISH, GLAZED)



MH75005 | 150x750mm



MH75006 | 150x750mm



MH75007 | 150x750mm



MADERERO SERIES

H75006 150mm x 750mm




MADERERO SERIES

H75007 150mm x 750mm

LOOS SERIES & MADERERO SERIES

1 size • 5 colors • 12 surface

Matt Finish, Glazed • 150mm x 750mm

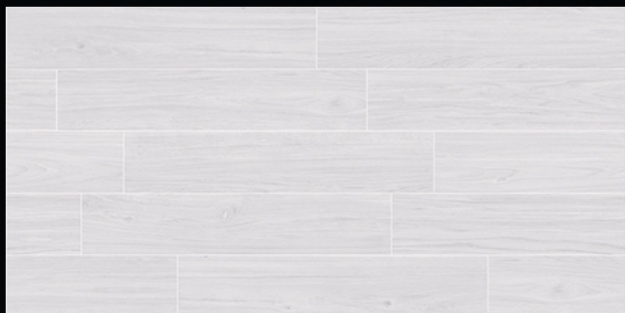

H75001



H75003



H75005















H75006




H75007

TILES REPORT

DIMENSIONS AND SURFACE QUALITY	PORCELAIN TILES - GROUP BIa		PHYSICAL PROPERTIES	PORCELAIN TILES - GROUP BIa		CHEMICAL PROPERTIES	PORCELAIN TILES - GROUP BIa	
	ISO 13006 Standard	White Horse Tiles (Test Result By SIRIM)		ISO 13006 Standard	White Horse Tiles (Test Result By SIRIM)		ISO 13006 Standard	White Horse Tiles (Test Result By SIRIM)
Length and Width	± 0.6%	Passed	 Water Absorption	Maximum 0.5%	Average 0.07% Individual Maximum 0.10%	 Chemical Resistance To Household Chemical Of Glazed Tiles	Minimum GB	No Visible Effect (GA)
Thickness	± 5%	Passed	 Breaking Strength	Not Less Than 1300N	Passed	 Chemical Resistance To Swimming Pool Salts Of Glazed Tiles	Minimum GB	No Visible Effect (GA)
Straightness of Sides	± 0.5%	Passed	 Modulus of Rupture	Minimum 35N/mm ²	Passed	 Chemical Resistance To Hydrochloric Acid (3%) Of Glazed Tiles	GLA: No Visible Effect	GLA
Rectangularity	± 0.5%	Passed	 Resistance to Deep Abrasion of Unglazed Tiles	Maximum 175mm ³	126mm ³	 Chemical Resistance To Citric Acid (100g/l) Of Glazed Tiles		GLB: Definite Change In Appearance
Flatness of Surface	± 0.5%	Passed	 Resistance to Surface Abrasion of Glazed Tiles	Class 1: Soft - Soled Footwear Without Scratching Dirt		 Chemical Resistance To Potassium Hydroxide (30g/l) Of Glazed Tiles	GLC: Partial Or Complete Loss Of The Original Surface	GLA
Centre Curvature				Class 2: Soft - Soled Footwear With Small Amounts Scratching Dirt				
Edge Curvature				Class 3: Normal Footwear With Small Amounts Scratching Dirt				
Warpage	± 0.5%	Passed						
Surface Quality	A minimum of 95% free from visible defects	Passed	 Crazing Resistance	No Crazing Observed		 Staining Resistance Test Of Glazed Tiles	Minimum Class 3	Passed

SHADE AND TONALITIES

V1 UNIFORM
FROM TILE TO TILE




V1

Colour range and tonality within the same shade is fairly uniform from tile to tile.

Minimal to zero difference among tiles from the same production run.

V2 SLIGHTLY NOTICEABLE
FROM TILE TO TILE



V2

Colour range and tonality within the same shade is slightly noticeable from tile to tile.

Visibly distinguished difference in design or pattern with minimal change in colour tones.

V3 MODERATELY NOTICEABLE
FROM TILE TO TILE



V3

Colour range and tonality within the same shade is moderately noticeable from tile to tile.

Visibly distinguished difference in design or pattern.

V4 DISTINCTLY NOTICEABLE
FROM TILE TO TILE










V4

Colour range and tonality within the same shade is distinctly noticeable from tile to tile.

Random colour differences from tile to tile create the possibility of unique tile compositions.

- The accuracy of colours shown in this brochure is as close as the printing process will allow.
- The appearance of tiles featured in this brochure may differ from the actual items sold.
- The pictures are only illustrative of the tile combinations.
- All tiles are packed in accordance with the standard packing list. For special orders and custom sizes, tile products will be custom-packed based on quality and specification requested.
- White Horse Ceramic Industries Sdn. Bhd. reserves the right to amend the colour range or specifications of tiles at any time without notice.

PACKAGING INFORMATION

SIZES	PCS/CTN	M2/CTN	KG/CTN	CTN/PLT	M2/PLT	KG/PLT
						
150X750MM	10	1.35	29.76	54	72.90	1,630.04



WHITE HORSE CERAMIC INDUSTRIES (VIETNAM) CO.,LTD



Certificate VN09/00023



Certificate VN13/00007



Certification No: 024 - 012



TIS 2508-2555 (2012)
White Horse Ceramic (Thailand)



ISO 13006 : 2010
L 839-012-02N
NPB 110 - 131 - 171342



CERTIFIED
Product Quality
PQ License No. : Q-1401



QUATEST 3
27-10



QUATEST 3
ISO 13006:2012



放射性水平 A 类
Certification No: 20095210200540



SIRIM
CERTIFIED TO MS ISO 13006: 2010
Certification No: PMS19801