

### Trụ sở chính:

Đường số 2A, KCN Mỹ Xuân A,  
Huyện Tân Thành, Tỉnh Bà Rịa -  
Vũng Tàu, Việt Nam  
Tel: 84 064 393 2333  
Fax: 84 064 393 2338

### Chi nhánh Cần Thơ

225 Đường 3/2, Phường Hưng  
Lợi, Quận Ninh Kiều, TP.  
Cần Thơ  
Tel: 84 0710 383 9999  
Fax: 84 0710 383 1111

### Chi nhánh Hải Phòng

750 Nguyễn Văn Linh, Quận Lê  
Chân, TP. Hải Phòng  
Tel: 84 031 378 4555  
Fax: 84 031 378 4666

### Chi nhánh Hồ Chí Minh

270A Lý Thường Kiệt, Quận 10,  
TP. Hồ Chí Minh  
Tel: 84 08 3864 9800  
Fax: 84 08 3864 9808

### Chi nhánh Đà Nẵng

Lô 48, Đường số 4, KCN Đà Nẵng \_  
An Đồn, Quận Sơn Trà, TP. Đà Nẵng  
Tel: 84 0511 393 1222  
Fax: 84 0511 393 1228

### Chi nhánh Hà Nội

Khu vực kho Nhà Máy Đóng Tàu  
Hà Nội, Phường Thanh Trì,  
Quận Hoàng Mai, TP. Hà Nội  
Tel: 84 04 3644 6555  
Fax: 84 04 3644 6553

### Chi nhánh Nha Trang

Số 131B, Đường 23/10, Phường Phương Sơn,  
TP. Nha Trang, Tỉnh Khánh Hòa  
Tel: 84 058 3821 085  
Fax: 84 058 3821 086



### Công Ty TNHH Công Nghiệp Gốm Bạch Mã (Việt Nam)

Đường số 2A, KCN Mỹ Xuân A, Huyện Tân Thành, Tỉnh Bà Rịa Vũng Tàu

### WHITE HORSE CERAMIC INDUSTRIES (VIETNAM) CO.,LTD

Tel: 84 064 393 2333

Fax: 84 064 393 2338

Email: cshq@whitehorsevn.com.vn

Website: www.whitehorse.vn

whvn@vnn.vn

The accuracy of colours shown in this brochure is as close as the printing process will allow. The appearance of tiles featured in this brochure may differ from the actual items sold. The pictures are only illustrative of the tile combinations. White Horse Ceramic Industries (VN) co., ltd reserves the right to amend the colour range or specifications of tiles at any time and without notice. All tile are packed in accordance with the standard packing list. For special orders and custom sizes, tile products will be custom packed based on quantity and specification requested.

Độ chính xác của màu sắc trong catalogue chỉ mang tính chất tương đối của quy trình in cho phép. Màu sắc của gạch trong catalogue có thể khác so với thực tế. Hình ảnh chỉ mang tính chất minh họa. Công Ty TNHH Công Nghiệp Gốm Bạch Mã (Việt Nam) có quyền thay đổi màu sắc hoặc quy cách của gạch bất cứ lúc nào mà không cần báo trước. Tất cả các gạch được đóng gói theo tiêu chuẩn packing list. Đối với các đơn đặt hàng đặc biệt và kích thước theo yêu cầu, sản phẩm gạch sẽ được đóng gói riêng dựa theo số lượng và yêu cầu cụ thể.



SNI ISO 13000: 2010  
Certification No: 04 - 211318 RB



CERTIFIED  
Product Quality  
PS License No: Q-1401



37-10



QUATERTY 2  
ISO 9001:2008



放射性水平 A 类  
Certification No: 20090210200549



MS  
CERTIFIED TO ISO 9001:2008: 2003  
Certification No: PWF09601



SGS  
Certificate: VN09I00023



UKAS  
Certificate: VN13I00007



Certification No: 024 - 012



TIS 2508-2555 (2012)  
White Horse Ceramic (Thailand)

# POLISHED TILES

## SERIES

### 800mm x 800mm



WHITE HORSE  
GẠCH MEN  
BẠCH MÃ

MARMO SERIES  
800 mm x 800 mm





MARMO SERIES PL8000 800mm x 800mm 32" x 32"



MARMO SERIES PL8000 800mm x 800mm 32" x 32"

# SEMPLICE SERIES

800 mm x 800 mm



SEMPLICE SERIES HMP80907 800mm x 800mm 32" X 32"



SEMPlice SERIES HMP 80907 800mm x 800mm 32" x 32"



SEMPlice SERIES HMP 80907 800mm x 800mm 32" x 32"



SEMPLICE SERIES HMP 80910 800mm x 800mm 32" x 32"



SEMPLICE SERIES HMP 80910 800mm x 800mm 32" x 32"



SEMPLICE SERIES HMP80910 800mm x 800mm 32" x 32"




SEMPLICE SERIES HMP80910 800mm x 800mm 32" x 32"

# POLISHED TILES


800mm x 800mm 32" x 32"

## MARMO SERIES



PL8000

## SEMPlice SERIES

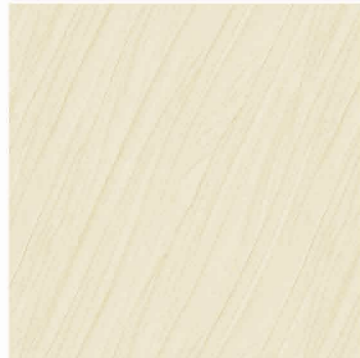

HMP80907



HMP80910

# WHITE HORSE TEST REPORTS

DIMENSIONS AND SURFACE QUALITY	PORCELAIN TILES - GROUP BIa		PHYSICAL PROPERTIES	PORCELAIN TILES - GROUP BIa		CHEMICAL PROPERTIES	PORCELAIN TILES - GROUP BIa	
	ISO 10545 Standard	White Horse Tiles (Test Result By SIRIM)		ISO 10545 Standard	White Horse Tiles (Test Result By SIRIM)		ISO 10545 Standard	White Horse Tiles (Test Result By SIRIM)
Length and Width	± 0.6%	Passed	Water Absorption	Maximum 0.5%	Average 0.07% Individual Maximum 0.10%	Chemical Resistance To Household Chemical Of Glazed Tiles	Minimum GB	No Visible Effect (GA)
Thickness	± 0.5%	Passed	Breaking Strength	Not Less Than 1300N	Average 2000N	Chemical Resistance To Swimming Pool Salts Of Glazed Tiles	Minimum GB	No Visible Effect (GA)
Straightness of Sides	± 0.5%	Passed	Modulus of Rupture	Minimum 35N/mm <sup>2</sup>	Average 63N/mm <sup>2</sup> Individual Minimum 56N/mm <sup>2</sup>	Chemical Resistance To Hydrochloric Acid (3%) Of Glazed Tiles	GLA: No Visible Effect	GLA
Rectangularity	± 0.6%	Passed	Resistance to Deep Abrasion of Unglazed Tiles	Maximum 175mm <sup>3</sup>	126mm <sup>3</sup>	Chemical Resistance To Citric Acid (100g/l) Of Glazed Tiles	GLB: Definite Change In Appearance	GLA
Flatness of Surface	± 0.5%	Passed	Resistance to Surface Abrasion of Glazed Tiles	Class3: For Normal Footwear Class4: For Regular Traffic With Some Scratching Dirt		Chemical Resistance To Potassium Hydroxide (30g/l) Of Glazed Tiles	GLC: Partial Or Complete Loss Of The Original Surface	GLA
Centre Curvature	± 0.5%							
Edge Curvature	± 0.5%							
Warpage	± 0.5%	Passed	Crazing Resistance	No Crazing Observed	Pass	Staining Resistance Test Of Glazed Tiles	Minimum Class 3	Class5 (Stain Can Be Easily Removed With Running Hot Water)
Surface Quality	A Minimum of 100% free from visible defects	Passed						

SIZE	CARTON		PALLET	
	Pcs/Ctn	Pallet	M2/Ctn	M2/Pallet
80 cm x 80 cm	3	32	1.92	61.44